



SCHMITZ

A SENSE OF CONFIDENCE

Your partner in surgery  
Furniture



## A Sense of Company

With more than 90 years of experience, SCHMITZ is one of the leading international manufacturers of medical products.

A family-owned business with a living tradition. Our typical employee has been with the company for some 18 years, proof of how strongly they identify with our values and philosophy.

In 2012, the company's management passed to Friedrich and Matthias Schmitz, the fourth generation of the family.

We are proud to be located in Germany and are deeply rooted in our home region. We develop and manufacture here.

90% of our suppliers are from Germany, of which 60% are from the local region.

## Made in Germany







## **A Sense of Care**

We understand the services which are our lifeblood, and aim to achieve maximum customer satisfaction. From consulting through planning to installation.


Cost-effectiveness through longevity is what you can expect from us.

With a well thought-out service concept and comprehensive support, SCHMITZ works alongside you as partner from start to finish.

### **Technical Customer Service**

T +49 (0)2377 84 549

service@schmitz-soehne.de

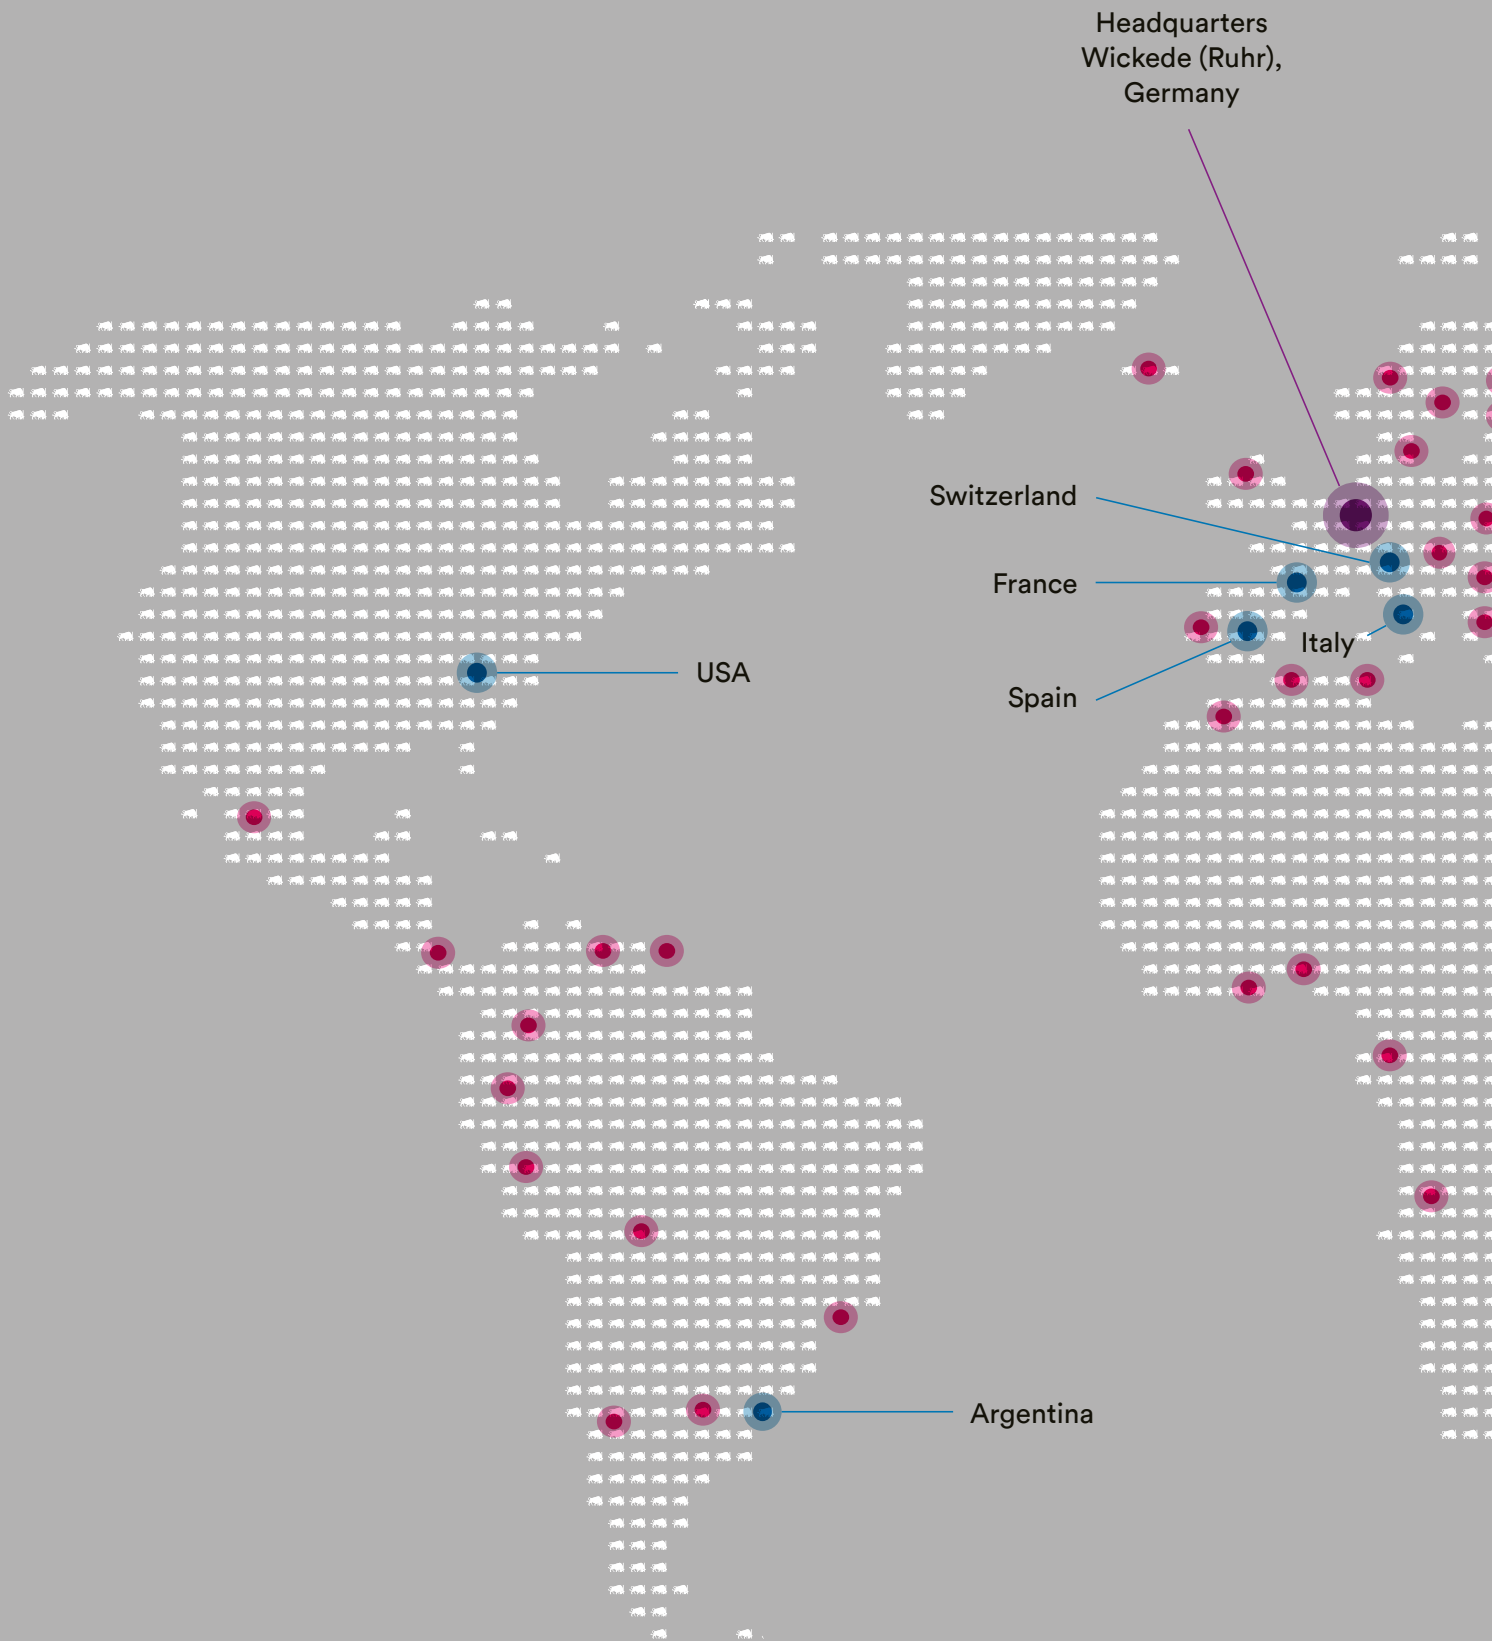

- Over 80 international trade partners
- Sales offices

## SCHMITZ – represented worldwide







**varimed®**

**The right equipment for every operating theatre.**

**Instrument serving tables**

Height-adjustable thanks to the step stirrup and a high-quality hydraulic pump capable of withstanding the heaviest day-to-day stresses in the OR theatre.

**Instrument tables**

100% stainless chromium nickel steel 18/10, always in the right position thanks to smooth running plastic double castors.

**Theatre seats**

Featuring foot ring release and braked castors that enable precise, controlled and safe rolling movements.

Gas-sprung height adjustment and the optional backrest ensure ergonomic working conditions over a long period of time.

**Bowl stands**


One or two bowls or for heating rinsing solutions – for hygienic work in the operating theatre.

**Additional accessories from SCHMITZ**

Surgeon's stool, one and two steps, mobile refuse buckets and height-adjustable drip-feed stands round off the range – complete equipment for optimal convenience in the operating theatre.





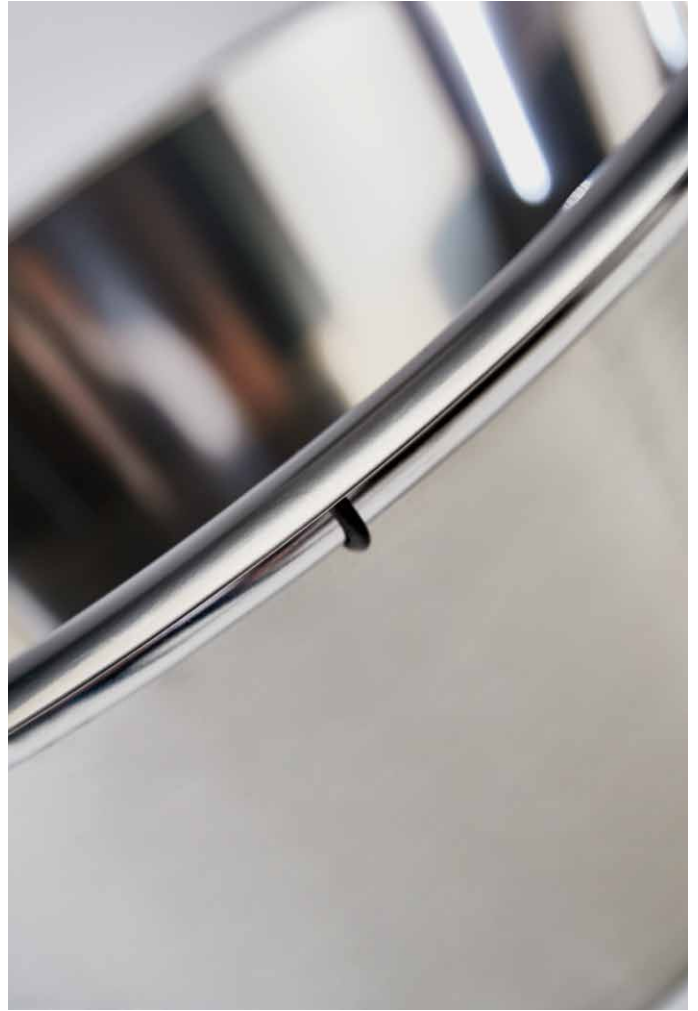



222.1650.0

222.1670.0



222.1660.0

222.1680.0






## varimed® Theatre seats

Model No. Description


### 222.1650.0 Theatre seat

Specially-designed upholstered seat with antistatic cover, black, height adjustment from 560 to 790 mm by means of gas spring, with foot ring release. 5-arm pedestal powder coated in grey aluminium RAL 9007 with antistatic double plastic castors of 50 mm, unbraked when loaded, circular black bumper. Safe working load: 135 kg




### 222.1670.0 Theatre seat

as 222.1650.0, but with additional back rest with antistatic cover, black.




### 222.1660.0 Theatre seat

Saddle-shaped pad with antistatic cover, black, height adjustment from 560 to 790 mm by means of gas spring, with foot ring release. 5-arm pedestal powder coated in grey aluminium RAL 9007 with antistatic double plastic castors of 50 mm, unbraked when loaded, circular black bumper. Safe working load: 135 kg



### 222.1680.0 Theatre seat

as 222.1660.0, but with additional back rest with antistatic cover, black.



### 200.0011.0 Brake loaded castors

(w/o ill.)

Suitable for theatre seats 222.1650.0 to 222.1680.0.  
Castors **brake under load and cannot move**, but move freely without load.

**Surcharge**






## varimed® Surgeon's stools

Model No. Description

---



**222.1530.0 Surgeon's stool**


5-arm pedestal in 18/10 stainless steel, antistatic double castors diam. 50 mm of plastic material, rust-proof, seat disc upholstered, antistatic cover, black. Height adjustment by means of threaded spindle with end stop, seat diam. 350 mm, height adjustment from 485 to 655 mm. Safe working load: 135 kg



Thanks to the levelled foot section, the instrument serving table can be placed conveniently under the mobile operating table.



## varimed® Instrument serving tables



Model No.	Description
-----------	-------------

<b>232.4210.0</b>	<b>Instrument serving table</b>
-------------------	---------------------------------

With foot pump, height adjustment thanks to step stirrup from 950 to 1,350 mm, seamlessly deep-drawn tabletop made of CNS 18/10, 700 × 500 mm, detachable, rounded edges and corners, stand pipe and supporting frame made of CNS 18/10, base levelled on one side, enclosed double castors Ø 75 mm, made of plastic, with ball bearings, electroconductive, rust-proof. Safe working load: 15 kg

- Space-saving positioning thanks to levelled foot section
- Instruments within immediate reach
- Reduced risk of tripping
- Generous height adjustment thanks to foot pedal

<b>200.0012.0</b>	<b>2 castors with lock</b>
-------------------	----------------------------


**Surcharge**





## varimed® Instrument serving tables


Model No. Description



**232.4170.0 Instrument serving table**  
with foot-operated pump, height adjustment from 950 to 1,350 mm by means of foot bar, 18/10 stainless steel table top 700 × 500 mm, removable, with raised edge, 360° rotatable, to be fixed in each position, rounded corners and edges; support column and frame in 18/10 stainless steel, pedestal clad in stainless steel, double plastic castors diam. 75 mm, ball bearing, antistatic, rust-proof.  
Safe working load with table-top in any position: 30 kg.

- Enhanced cleaning and disinfecting properties thanks to electropolished surface
- 360° rotatable table top even when charged with a load of 30 kg
- High-quality hydraulic pump passing toughest of endurance tests
- 400 mm height adjustment range requires only 25 pumping actions
- Rounded edges of the table-top minimize the risk of injury to the OR team

**232.4180.0 Instrument serving table**  
as 232.4170.0, but table top 600 × 400 mm.



**232.4190.0 Instrument serving table**  
as 232.4170.0, but height adjustment from 800 to 1,200 mm.

**232.4200.0 Instrument serving table**  
as 232.4170.0, but table top 600 × 400 mm, height adjustment from 800 to 1,200 mm.

**200.0012.0 2 castors with lock**

Surcharge



232.4260.0



232.4270.0



232.4460.0 / 200.4110.0






## varimed® Instrument serving tables, Hand/arm OR table

Model No. Description


### 232.4260.0 Instrument serving table

18/10 stainless steel frame, 18/10 stainless steel table top 600 × 400 mm, non-rotatable, height adjustable from 900 to 1,320 mm, double plastic castors diam. 50 mm, antistatic, rust-proof.  
Safe working load: 12 kg.




### 232.4270.0 Instrument serving table\*

manually operated height adjustment from 800 – 1,200 mm. Mobile 4-arm pedestal of 18/10 stainless steel and stainless steel table, top with reflex free and disinfectant-proof surface. 4 swivel castors, 2 of which lockable, resistant to abrasions, antistatic, diam. 75 mm, with friction bearing.  
Safe working load: 30 kg



### 232.4460.0 Hand and arm operating table\*

pedestal of 18/10 stainless steel. Table top X-ray permeable, tiltable by means of ball-and-socket-joint, with clamping lever. Manually height adjustable from 650 – 950 mm. 4 swivel castors, lockable, resistant to abrasions, antistatic, diam. 75 mm, with friction bearing.  
Safe working load: 40 kg.



### 200.4110.0 Upholstered pad\*

antistatic, X-ray permeable, detachable, 450 × 450 × 30 mm, for the hand and arm operating table 232.4460.0.



232.5410.0


232.5610.0





## varimed® Instrument tables

Model No. Description




### 232.5210.0 Instrument table

18/10 SST rectangular tube frame (frame also serves as protection rail), 18/10 SST table tops 600 × 450 mm, detachable, table height 800 mm, 4 plastic double castors diam. 75 mm, antistatic, antirust, abrasion-proof, 2 of which lockable, with 4 bumpers. Safe working load per shelf: 50 kg

### 232.5220.0 Instrument table

as 232.5210.0, but of 900 mm height.




### 232.5310.0 Instrument table

18/10 SST rectangular tube frame, two stainless steel 18/10 shelves, top shelf 650 × 500 mm covering frame, lower one as inserted plate of 600 × 450 mm, detachable, table height 800 mm, 4 plastic double castors diam. 75 mm, antistatic, antirust, abrasion-proof, 2 of which lockable, with 4 bumpers. Safe working load per shelf: 50 kg

### 232.5320.0 Instrument table

as 232.5310.0, but of 900 mm height.




### 232.5410.0 Instrument table

18/10 SST rectangular tube frame (frame also serves as protection rail), 18/10 SST table tops 700 × 600 mm, detachable, table height 800 mm, 4 plastic double castors diam. 75 mm, antistatic, antirust, abrasion-proof, 2 of which lockable, with 4 bumpers. Safe working load per shelf: 50 kg

### 232.5420.0 Instrument table


as 232.5410.0, but of 900 mm height.



Model No. Description


**232.5510.0 Instrument table**  
18/10 SST rectangular tube frame, two stainless steel 18/10 shelves, top shelf 750 × 650 mm covering frame, lower one as inserted plate of 700 × 600 mm, detachable, table height 800 mm, 4 plastic double castors diam. 75 mm, antistatic, antirust, abrasion-proof, 2 of which lockable, with 4 bumpers. Safe working load per shelf: 50 kg

**232.5520.0 Instrument table**  
as 232.5510.0, but of 900 mm height.

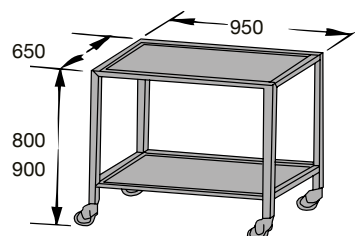

**232.5610.0 Instrument table**  
18/10 SST rectangular tube frame (frame also serves as protection rail), 18/10 SST table tops 900 × 600 mm, detachable, table height 800 mm, 4 plastic double castors diam. 75 mm, antistatic, antirust, abrasion-proof, 2 of which lockable, with 4 bumpers. Safe working load per shelf: 50 kg

**232.5620.0 Instrument table**  
as 232.5610.0, but of 900 mm height.

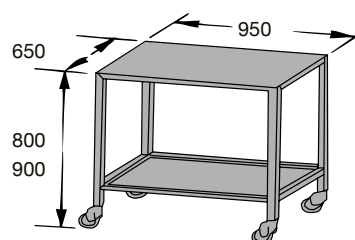

**232.5710.0 Instrument table**  
18/10 SST rectangular tube frame, two stainless steel 18/10 shelves, top shelf 950 × 650 mm covering frame, lower one as inserted plate of 900 × 600 mm, detachable, table height 800 mm, 4 plastic double castors diam. 75 mm, antistatic, antirust, abrasion-proof, 2 of which lockable, with 4 bumpers. Safe working load per shelf: 50 kg

**232.5720.0 Instrument table**  
as 232.5710.0, but of 900 mm height.









## varimed® Bowl stands

Model No. Description




**242.1250.0 Bowl stand\***  
18/10 stainless steel frame, one 18/10 SST bowl, capacity 6 l, plastic double castors diam. 50 mm, antistatic, rust-proof, height 815 mm, disassembled.

**200.3070.0 Bowl\***  
SST 18/10 (extra).



**242.1350.0 Bowl stand\***  
18/10 stainless steel frame, two 18/10 SST bowls, capacity 6 l ea., plastic double castors diam. 50 mm, antistatic, rust-proof, height 815 mm, disassembled.

**200.3070.0 Bowl\***  
SST 18/10 (extra).



**242.1310.0 Bowl stand C€MD**  
for heating of physiological saline solutions, with button to switch the temperature from 35 °C to max. 60 °C, with safety thermostat and scale reading. Teflon-coated heating plate for easy cleaning. 5-arm base of stainless steel, height adjustable by servo-assisted gas cylinders; plastic castors diam. 75 mm, rust-proof, with brake, 3 of which antistatic, SST bowl with litre-scale, capacity 5 l. Earth contact. Voltage: 230 V, 50 Hz, 400 W, connection cable with EPR (earth potential rise) protection, 5 m long with plug.

**200.5600.0 5 L Bowl C€MD**  
stainless steel 18/10, with litre-scale (extra).

**200.5610.0 Fastening ring C€MD**  
for aseptic cover


**!** Important:  
For reasons of safety only use original bowls from SCHMITZ



## varimed® Steps, refuse buckets

Model No. Description


**251.1010.0 Step**  
18/10 stainless steel frame, fine-ribbed anti-slip tread in 18/10 stainless steel, floor pads antistatic, tread height 240 mm. Safe working load: 185 kg




**251.1030.0 Step**  
as 251.1010.0, but tread height 120 mm.

**251.1040.0 Step**  
as 251.1010.0, but tread height 300 mm.

**251.1020.0 Step**  
18/10 stainless steel frame, fine-ribbed anti-slip treads in 18/10 stainless steel, floor pads antistatic. Safe working load: 185 kg




**252.1180.0 Refuse bucket**  
removable 12 l bucket in 18/10 stainless steel, 18/10 stainless steel frame with profiled plastic wrap-around bumper, double plastic castors diam. 50 mm, antistatic, rust-proof; frame height 230 mm.




**252.1190.0 Refuse bucket**  
as 252.1180.0 above, with pushing handle in 18/10 stainless steel.

**200.1370.0 Bucket lid**  
in 18/10 stainless steel.





**200.1350.0 12 L Bucket**  
in 18/10 stainless steel (extra) for 252.1180.0 and 252.1190.0.



**varimed®**


## Furniture for OR theatres and outpatient departments – Accessories



Model No.	Description
<b>200.4110.0</b>	<b>Pad*</b> antistatic, X-ray permeable, for hand and arm operating table 232.4460.0.
<b>200.3070.0</b>	<b>Bowl*</b> for bowl stands 242.1250.0 and 242.1350.0, 18/10 SST, diam. of 320 mm, depth of 130 mm.
<b>200.5600.0</b>	<b>Bowl</b> (w/o ill.) stainless steel 18/10, with litre-scale for 242.1310.0.
<b>200.5610.0</b>	<b>Fastening ring</b> (w/o ill.) for aseptic cover for 242.1310.0.

## varimed® C€<sup>MD</sup> Drip-feed stands


Model No.	Description
-----------	-------------



<b>242.2350.0</b>	<b>Drip-feed stand*</b>
-------------------	-------------------------

	18/10 stainless steel frame, disassembled, 5-arm base, upper section with 4 hooks, drip glass, double plastic castors diam. 50 mm, antistatic, rust-proof; height adjustment from 1,300 to 2,120 mm, one-hand action.
--	---


	Safe working load: 2 kg (per hook).
--	-------------------------------------



<b>242.2351.0</b>	<b>Drip-feed stand*</b>
-------------------	-------------------------

	5-arm base of 18/10 stainless steel frame, drip glass, double plastic castors diam. 50 mm, 2 of which lockable, antistatic, upper section with four 18/10 stainless steel hooks, drip glass, height adjustment from 1,350 to 2,150 mm, one-hand action, footprint 635 mm.
--	---

	Safe working load: 2 kg (per hook).
--	-------------------------------------

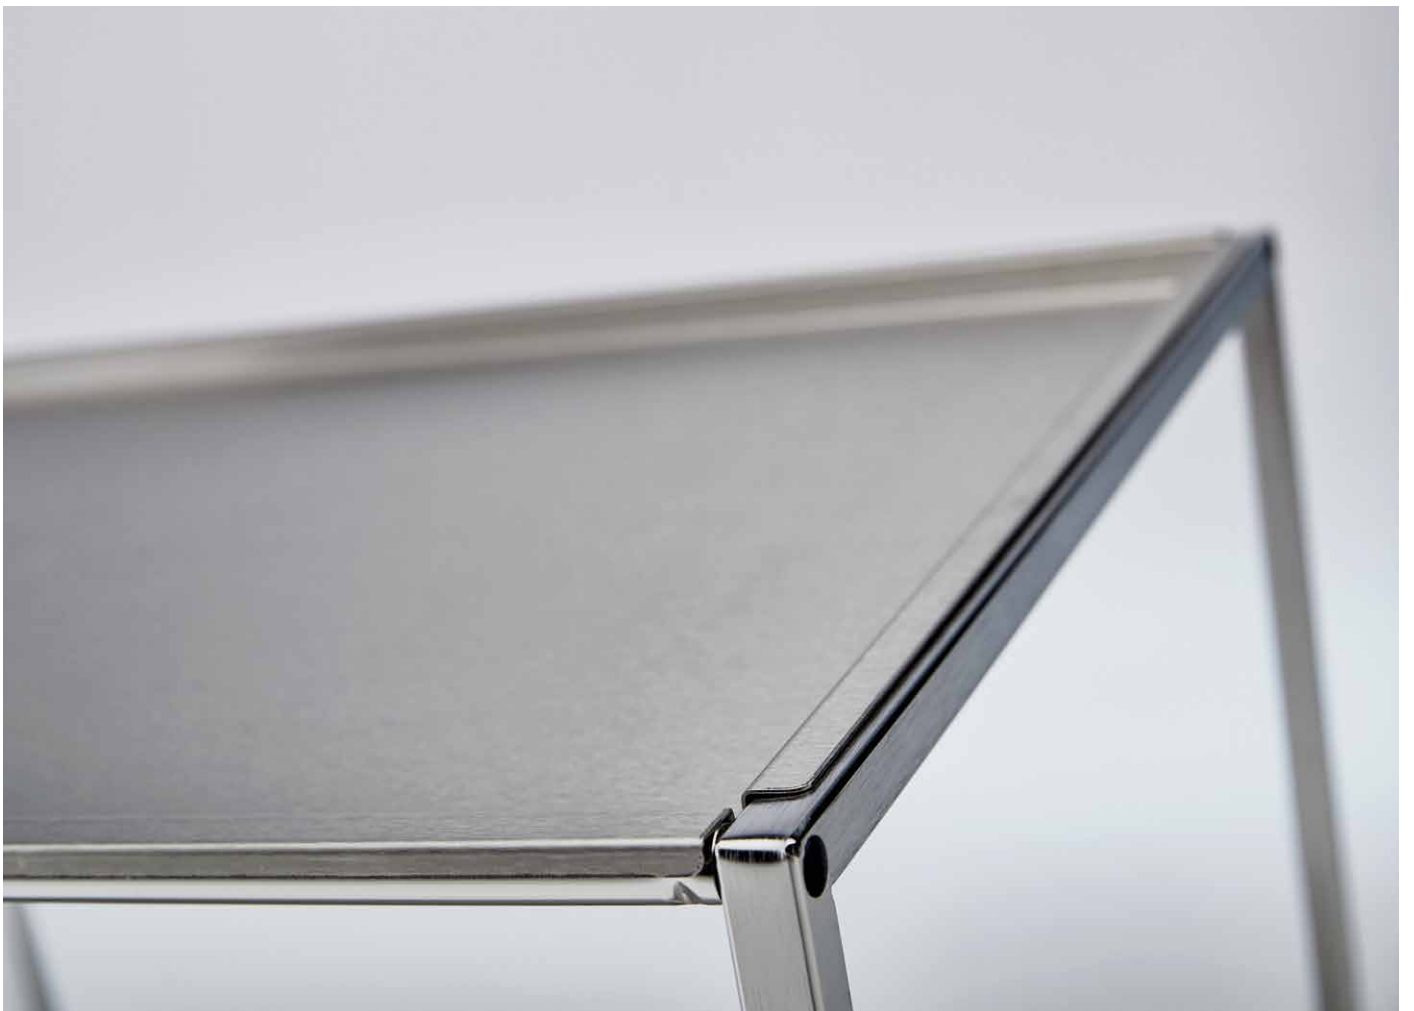



## **varimed®**

### **Furniture for OR theatres and outpatient departments – Material description**

Frames in stainless steel 18/10, round or rectangular tubing, electropolished.

Stainless steel tops as well as claddings are of ground, brushed finish (grain size 180).

All castors are resistant to abrasions.

Seat upholsteries of top quality, hardwearing foam rubber with antistatic black cover.



## Contact

SCHMITZ u. Söhne  
GmbH & Co. KG  
Zum Ostenfeld 29  
58739 Wickede (Ruhr)

P. O. Box 14 61  
58734 Wickede (Ruhr)  
Germany

T +49 (0)2377 84 0  
F +49 (0)2377 84 162  
zentrale@schmitz-soehne.de

Exports department:  
T +49 (0)2377 84 0  
F +49 (0)2377 84 135  
export@schmitz-soehne.de

Technical service, hotline:  
T +49 (0)2377 84 549  
F +49 (0)2377 84 210  
service@schmitz-soehne.de

Information on our  
establishments worldwide  
can be found  
on our website:

[www.schmitz-soehne.com](http://www.schmitz-soehne.com)



All devices marked with the CE-MD symbol, in combination with our accessories, meet the requirements of Medical Device Regulation 2017/745/EU (MDR) as well as the Medical Device Amendment Act and are risk class I medical devices.



All devices marked with the simple CE symbol meet the requirements of low-voltage directive 2014/35/EU as well as the regulation on electrical equipment.

Please also refer to the instructions for use, for more details about the intended use!



\* This product is an article of merchandise, sold under OEM brand name.

Our goods and services are to be understood ex works. Deliveries are effected via our authorized partners or branch offices. The company reserves the right to alter the design, construction, dimensions and finish of its products without notice. All relevant dimensions and weights are to be understood as approximate information/data. Due to technical reasons colour deviations are possible. The articles shown in this catalogue are not authorized for sale in the United States.

Nominal charge 3.00 Euro.